


## **RIG #105 CONDUCTOR CASING SCHEMATIC**

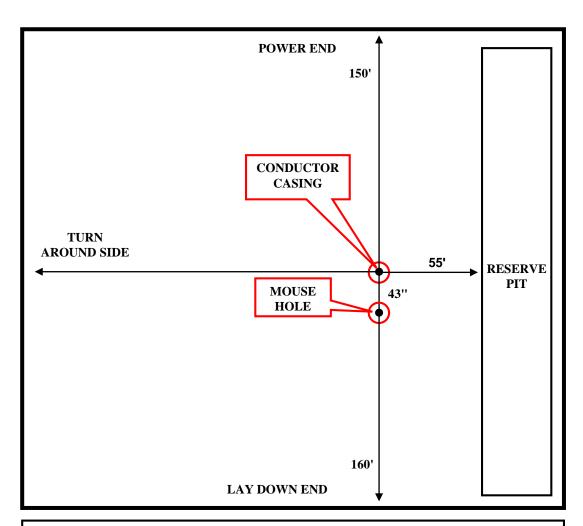

**Note:** <u>All</u> measurements are from the center of the conductor casing. The mouse hole is 43" from the center of the conductor casing  $w/0^{\circ}$  slope (angle). This rig has a top drive so the mouse hole should be a minimum of 75' deep (from ground level) with casing or liner with a minimum ID of 10". The reserve pit is a minimum of 55' from the center of conductor casing.